




A mountain bike with its priorities straight: progressive design, maximum agility, proven durability.

### Produktspezifikation

---

<b>Rahmen</b>	130mm travel, SmartForm C1 Alloy, Proportional Response Tuned, Ai offset drivetrain, ISCG05, BSA 83, Post mount brake, tapered headtube
<b>Gabel</b>	Fox Float Rhythm 34, 140mm, Grip Damper, Sweep-Adj, 15x110, tapered steerer, 51mm offset
<b>Dämpfer</b>	Fox Float Performance DPS EVOL, 3-Pos adj.
<b>Felgen</b>	WTB ST i25 TCS 2.0, 32h, tubeless ready
<b>Naben</b>	(F) Formula 15x110 (R) Formula 12x148 w/ HG driver 12x148
<b>Speichen</b>	Stainless steel, 14g
<b>Reifen</b>	(F) Maxxis Minion DHF 29 x 2.5" WT, Dual compound, EXO puncture protection, tubeless ready (R) Maxxis High Roller II 29 x 2.3", Dual compound, EXO puncture protection, tubeless ready
<b>Pedale</b>	Not Included
<b>Kurbel</b>	SRAM X1-1000 Eagle DUB, 30T, Ai offset
<b>Tretlager</b>	SRAM DUB BSA MTB83
<b>Kette</b>	SRAM NX Eagle, 12-speed
<b>Zahnkränze</b>	SRAM PG-1230, NX Eagle, 11-50, 12-speed
<b>Schaltwerk</b>	SRAM NX Eagle
<b>Schalthebel</b>	SRAM NX Eagle, 12-speed
<b>Lenker</b>	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
<b>Griffe</b>	Fabric Funguy Locking Grips
<b>Vorbau</b>	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
<b>Steuersätze</b>	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
<b>Bremsen</b>	SRAM Guide T hydro disc, 180/180mm Centerline rotors
<b>Sattel</b>	Fabric Scoop Shallow Sport, steel rails
<b>Sattelstütze</b>	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M-XL)
<b>Größen</b>	S, M, L, XL

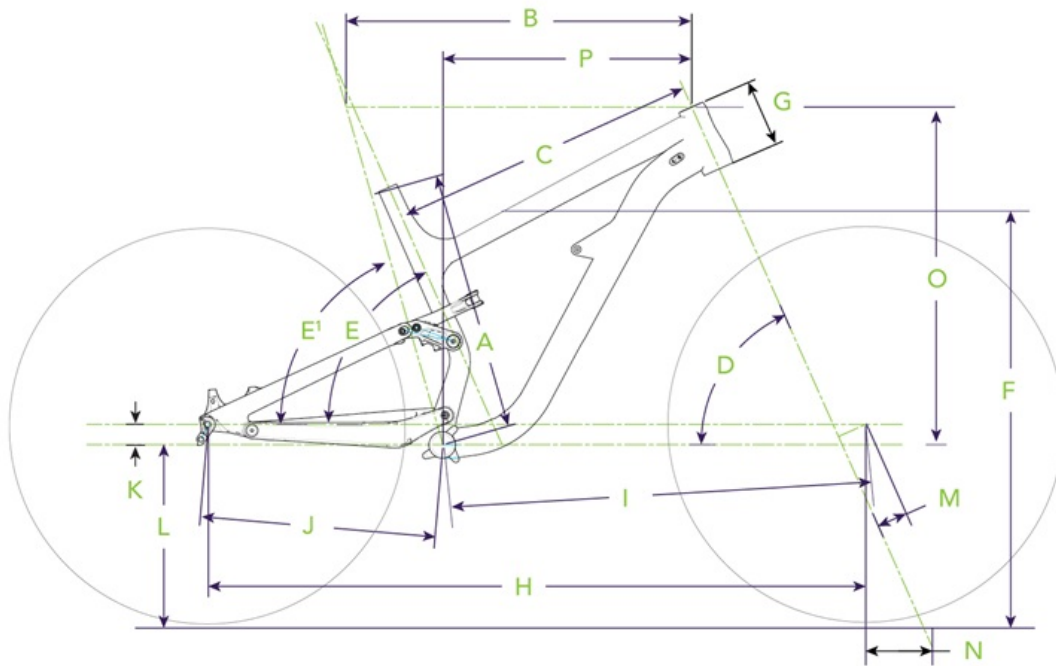

## Habit

	XS	SM	MD	LG	XL
<b>A SEAT TUBE LENGTH (CM)</b>	38	40	44	48	52
<b>B TOP TUBE HORIZONTAL (CM)</b>	53.8	57.3	60.6	63.9	67.1
<b>C TOP TUBE ACTUAL (CM)</b>	47.6	51.0	54.3	57.9	61.7
<b>D HEAD TUBE ANGLE</b>	66.0°	66.0°	66.0°	66.0°	66.0°
<b>E SEAT TUBE ANGLE</b>	74.5°	74.5°	74.5°	74.5°	74.5°
<b>E' SEAT TUBE ANGLE EFFECTIVE</b>	66.3°	66.3°	66.3°	66.3°	66.3°
<b>F STANDOVER (CM)</b>	70	72	75	77	78
<b>G HEAD TUBE LENGTH (CM)</b>	9.5	10.5	11.5	12.5	13.5
<b>H WHEELBASE (CM)</b>	110.3	114.2	117.6	121	124.4
<b>I FRONT CENTER (CM)</b>	67.0	71.0	74.3	77.8	81.1
<b>J CHAIN STAY LENGTH (CM)</b>	43.5	43.5	43.5	43.5	43.5
<b>K BOTTOM BRACKET DROP (CM)</b>	2.8	3.8	3.8	3.8	3.8
<b>L BOTTOM BRACKET HEIGHT (CM)</b>	33.1	33.9	33.9	33.9	33.9
<b>M FORK RAKE (CM)</b>	4.4	5.1	5.1	5.1	5.1
<b>N TRAIL (CM)</b>	11.2	11.2	11.2	11.2	11.2
<b>O STACK (CM)</b>	60	60.7	61.6	62.5	63.4
<b>P REACH (CM)</b>	36.6	40.0	43.0	46.0	49.0