




A mountain bike with its priorities straight: progressive design, maximum agility, proven durability.

Produktspezifikation

Rahmen	130mm travel, SmartForm C1 Alloy, Proportional Response Tuned, Ai offset drivetrain, ISCG05, BSA 83, Post mount brake, tapered headtube
Gabel	RockShox Recon RL, 130mm, DebonAir, 51mm offset
Dämpfer	RockShox Deluxe Select, DebonAir
Felgen	WTB STX i23 TCS, 32h, tubeless ready
Speichen	Stainless Steel, 14g (Ai Offset Dish - rear)
Reifen	Maxxis Ardent 29 x 2.4" Dual compound, Exo puncture protection
Pedale	Not Included
Kurbel	Race Face Ride Cinch, 30T
Tretlager	Race Face Outboard BB
Kette	KMC X11, 11-speed
Zahnkränze	Sunrace, 11-46, 11-speed
Schaltwerk	Shimano SLX GS
Schalthebel	Shimano SLX, 11-speed
Lenker	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Griffe	Fabric Funguy Locking Grips
Vorbau	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
Steuersätze	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Bremsen	Shimano MT200 hydro disc, 180/180mm RT10 rotors
Sattel	Cannondale Stage 3
Sattelstütze	Cannondale 3, 6061 Alloy, 31.6 x 350mm
Größen	S, M, L, XL

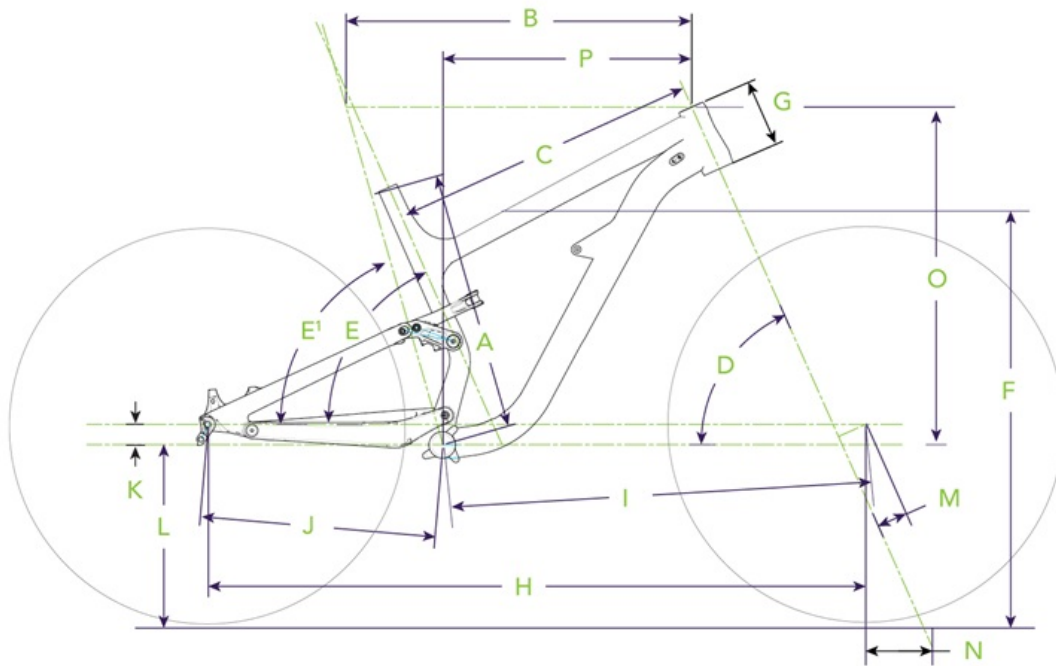

Habit

	XS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM)	38	40	44	48	52
B TOP TUBE HORIZONTAL (CM)	53.8	57.3	60.6	63.9	67.1
C TOP TUBE ACTUAL (CM)	47.6	51.0	54.3	57.9	61.7
D HEAD TUBE ANGLE	66.0°	66.0°	66.0°	66.0°	66.0°
E SEAT TUBE ANGLE	74.5°	74.5°	74.5°	74.5°	74.5°
E' SEAT TUBE ANGLE EFFECTIVE	66.3°	66.3°	66.3°	66.3°	66.3°
F STANDOVER (CM)	70	72	75	77	78
G HEAD TUBE LENGTH (CM)	9.5	10.5	11.5	12.5	13.5
H WHEELBASE (CM)	110.3	114.2	117.6	121	124.4
I FRONT CENTER (CM)	67.0	71.0	74.3	77.8	81.1
J CHAIN STAY LENGTH (CM)	43.5	43.5	43.5	43.5	43.5
K BOTTOM BRACKET DROP (CM)	2.8	3.8	3.8	3.8	3.8
L BOTTOM BRACKET HEIGHT (CM)	33.1	33.9	33.9	33.9	33.9
M FORK RAKE (CM)	4.4	5.1	5.1	5.1	5.1
N TRAIL (CM)	11.2	11.2	11.2	11.2	11.2
O STACK (CM)	60	60.7	61.6	62.5	63.4
P REACH (CM)	36.6	40.0	43.0	46.0	49.0