


2020 Scalpel Si Carbon 4



An exciting, exacting XC racing bike designed to conquer the aggressive terrain of modern World Cup courses.

Produktspezifikation

Rahmen	BallisTec Carbon, 100mm travel, Zero Pivot seatstay, Carbon Link, PF30-83, 1.5 Si head tube, Ai Offset
Gabel	Lefty Ocho, 27.5/29", 100mm, Chamber Damper with cable lockout, OppO Spring System, tapered steerer, 50/55mm offset
Dämpfer	RockShox Monarch RL
Felgen	Stan's NoTubes Crest S1, 28h, tubeless ready
Naben	(F) Lefty 60 (R) Formula 12x142 w/ HG driver
Speichen	DT Swiss Competition (Ai Offset dish - rear)
Pedale	Not Included
Kurbel	Truvativ Stylo 6K DUB, 34T, Ai offset
Tretlager	SRAM DUB PF30 MTB83
Kette	SRAM NX Eagle, 12-speed
Zahnkränze	SRAM PG-1230, NX Eagle, 11-50, 12-speed
Schaltwerk	SRAM GX Eagle
Schalthebel	SRAM NX Eagle, 12-speed
Lenker	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm
Griffe	Cannondale Locking Grips
Vorbau	Cannondale 3, 6061 Alloy, 31.8, 7°
Steuersätze	Integrated, 1-1/8 to 1.5", sealed angular contact bearings (Integrated steer stop size small only)
Bremsen	SRAM Level TL hydro disc, 180/160mm Centerline rotors
Sattel	Fabric Scoop Flat Elite, cro-mo rails
Sattelstütze	Cannondale 2, 7075 Alloy, 31.6 x 400mm
Größen	S, M, L, XL
Extra(s)	Cannondale Wheel Sensor

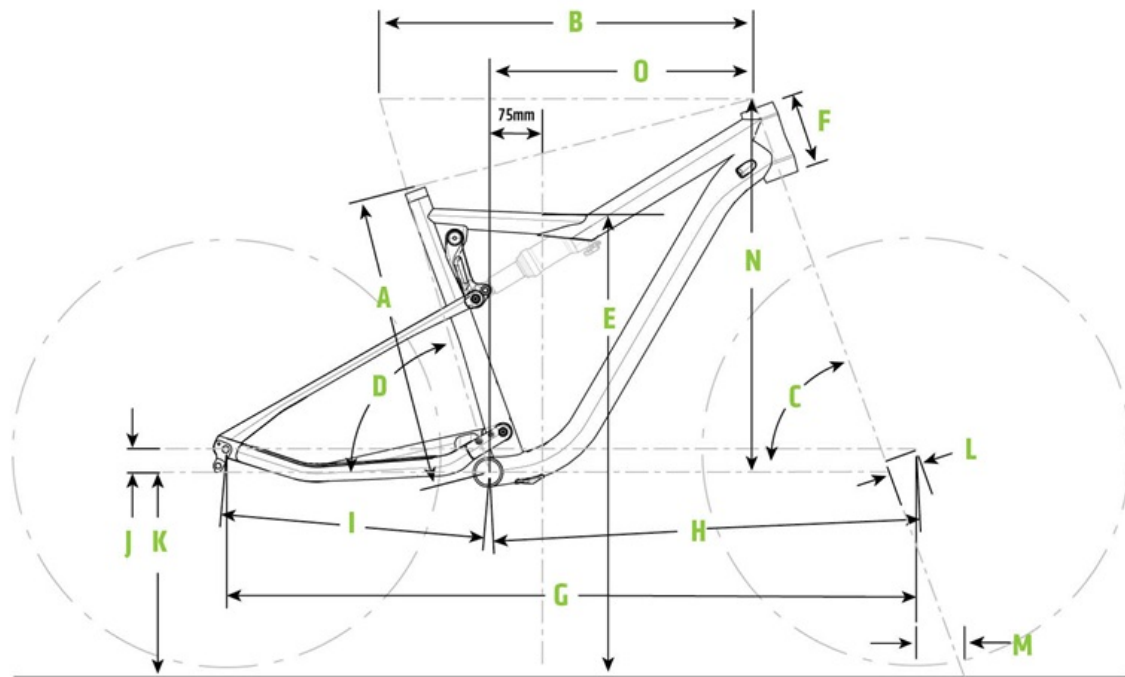

SCALPEL-Si

	S (27.5)	M (29)	L (29)	XL (29)
A SEAT TUBE LENGTH (CM/IN)	40/15.7	44/17.3	48/18.8	52/20.4
B TOP TUBE HORIZONTAL (CM/IN)	57/22.4	59.9/23.5	62.4/24.5	64.8/25.5
C HEAD TUBE ANGLE	69.5°	69.5°	69.5°	69.5°
D SEAT TUBE ANGLE EFFECTIVE	73.5°	73.5°	73.5°	73.5°
E STANDOVER (CM/IN)	71.6/28.1	75.4/29.6	76/29.9	76.6/30.1
F HEAD TUBE LENGTH (CM/IN)	9.7/3.8	11/4.3	12.2/4.8	13.4/5.27
G WHEELBASE (CM/IN)	107.9/42.4	111.8/44.0	114.4/45	116.9/46
H FRONT CENTER (CM/IN)	65.3/25.7	68.5/26.9	71.1/27.9	73.5/28.9
I CHAIN STAY LENGTH (CM/IN)	42.5/16.7	43.5/17.1	★	★
J BOTTOM BRACKET DROP (CM/IN)	2.0/0.8	3.8/1.5	★	★
K BOTTOM BRACKET HEIGHT (CM/IN)	33.3/13.1	33.4/13.1	★	★
L FORK RAKE (CM/IN)	5.0/2.0	5.5/2.1	★	★
M TRAIL (CM/IN)	7.5/3.0	7.7/3.0	★	★
N STACK (CM/IN)	55.0/21.6	59.2/23.3	60.4/23.7	61.5/24.2
O REACH (CM/IN)	40.7/16	42.4/16.6	44.5/17.5	46.6/18.3