

## 2020 Topstone Carbon 105

---




An unprecedented gravel bike with true suspension. The most capable off-road, the most comfortable on-road.

### Produktspezifikation

---

<b>Rahmen</b>	All-New, BallisTec Carbon, Kingpin suspension system, Proportional Response size-specific construction, Directline internal cable routing, BB30-83 Ai, 142x12 Speed Release thru-axle, flat-mount disc, removable fender bridge, multiple gear/bottle mounts, dropper post compatible
<b>Gabel</b>	All-New, BallisTec Carbon, 55mm OutFront offset, SAVE, 1-1/8" to 1.5" steerer, integrated crown race, Directline internal routing, 12x100mm Speed Release thru-axle, flat mount disc, gear/rack/fender mounts
<b>Felgen</b>	WTB ST i23 TCS, 28h, tubeless ready
<b>Naben</b>	(F) Formula CL-712, 12x100 centerlock / (R) Formula RXC-400, 12x142 centerlock
<b>Speichen</b>	Stainless Steel, 14g (Ai Offset Dish - rear)
<b>Reifen</b>	WTB Riddler TCS Light, 700 x 37c, tubeless ready
<b>Pedale</b>	Not Included
<b>Kurbel</b>	Cannondale 1, BB30a, FSA rings, 46/30
<b>Tretlager</b>	Cannondale Alloy PressFit30
<b>Kette</b>	KMC X11, 11-speed
<b>Zahnkränze</b>	Shimano 105, 11-34, 11-speed
<b>Umwerfer</b>	Shimano 105, braze-on
<b>Schaltwerk</b>	Shimano 105 GS
<b>Schalthebel</b>	Shimano 105 hydro disc, 2x11
<b>Lenker</b>	Cannondale 3, butted 6061 alloy, 16 deg flare drop
<b>Griffe</b>	Cannondale Grip Bar Tape w/Gel, 3.5mm
<b>Vorbau</b>	Cannondale 3, 6061 alloy, 31.8, 7°
<b>Steuersätze</b>	Integrated, 1.5" lower to 1-1/8" upper w/ reducer, 25mm Alloy top cap
<b>Bremsen</b>	Shimano 105 hydro disc, 160/160mm RT30 rotors
<b>Sattel</b>	Fabric Scoop Shallow Sport, steel rails
<b>Sattelstütze</b>	Cannondale 3, 6061 alloy, 27.2 x 350mm
<b>Größen</b>	XS, S, M, L, XL

**Extra(s)** Cannondale Wheel Sensor

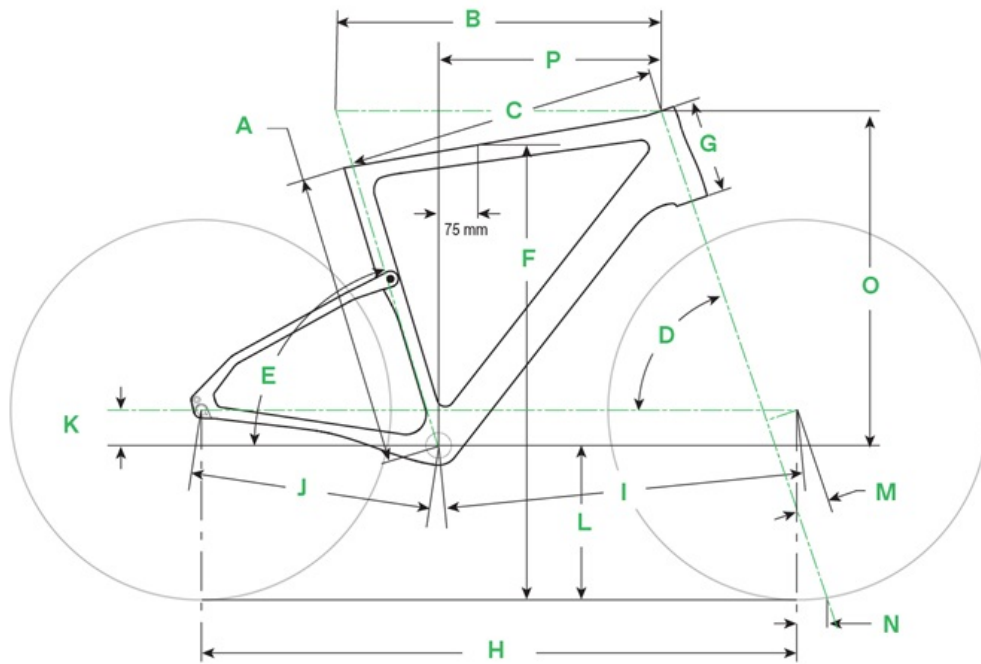

## Topstone Carbon

	XS	S	M	L	XL
<b>A SEAT TUBE LENGTH (CM)</b>	41.0	45.8	50.5	55.3	60.0
<b>B TOP TUBE HORIZONTAL (CM)</b>	52.5	54.4	56.1	57.9	59.6
<b>C TOP TUBE ACTUAL (CM)</b>	N/A				
<b>D HEAD TUBE ANGLE</b>	70.0°	71.2°	71.2°	71.2°	71.2°
<b>E SEAT TUBE ANGLE</b>	73.1°	73.1°	73.1°	73.1°	73.1°
<b>F STANDOVER (CM)</b>	71.5	76.1	80.3	84.3	88.5
<b>G HEAD TUBE LENGTH (CM)</b>	9.7	13.1	16.5	19.8	23.2
<b>H WHEELBASE (CM)</b>	99.9	101.0	103.0	104.0	106.0
<b>I FRONT CENTER (CM)</b>	59.4	60.4	62.3	64.2	66.0
<b>J CHAIN STAY LENGTH (CM)</b>	41.5	41.5	41.5	41.5	41.5
<b>K BOTTOM BRACKET DROP (CM)</b>	6.9	6.4	6.1	6.1	5.9
<b>L BOTTOM BRACKET HEIGHT (CM)</b>	27.3	27.8	28.0	28.0	28.3
<b>M FORK RAKE (CM)</b>	5.5	5.5	5.5	5.5	5.5
<b>N TRAIL (CM)</b>	6.6	5.8	5.8	5.8	5.8
<b>O STACK (CM)</b>	51.8	54.9	57.9	61.0	64.0
<b>P REACH (CM)</b>	36.8	37.7	38.5	39.4	40.2