


2020 Synapse Carbon Disc 105



A road bike that's light, stiff, fast and surprisingly comfortable. Your rides will go longer. You'll barely notice.

Produktspezifikation

Rahmen	BallisTec Carbon, Di2 ready, SAVE, BB30a, flat mount, 12mm thru axle, internal cable routing, removable fender bridge
Gabel	BallisTec Carbon, SAVE, integrated crown race, 12x100mm thru-axle, internal routing, size-specific design - 44-48: 1 1/8" steerer, 60mm rake 51-54: 1-1/8" - 1-1/4" tapered steerer, 55mm rake 56-61: 1-1/8" - 1-3/8" tapered steerer, 45mm rake
Felgen	RD 2.0, 28h
Naben	(F) Formula CL-712, 12x100mm centerlock (R) Formula RXC-400, 12x142 centerlock
Speichen	Stainless steel, 14g
Reifen	Vittoria Zaffiro Pro Bright Black, 700 x 30c
Pedale	Not Included
Kurbel	Cannondale 1, BB30a, FSA rings, 50/34
Tretlager	Cannondale Alloy PressFit30
Kette	Shimano HG601, 11-speed
Zahnkränze	Shimano 105, 11-34, 11-speed
Umwerfer	Shimano 105, braze-on
Schaltwerk	Shimano 105 GS
Schalthebel	Shimano 105 hydro disc, 2x11
Lenker	Cannondale 3, 6061 alloy, Compact
Griffe	Cannondale Grip Bar Tape w/Gel, 3.5mm
Vorbau	Cannondale 3, 6061 alloy, 7-degree
Steuersätze	Synapse, 1-1/4" lower bearing, 25mm top cap
Bremsen	Shimano 105 hydro disc, 160/160mm RT30 rotors
Sattel	Fabric Scoop Shallow Sport, steel rails
Sattelstütze	Cannondale 3, 6061 Alloy, 25.4 x 350mm (46-56), 400mm (58-61)
Größen	48, 51, 54, 56, 58, 61

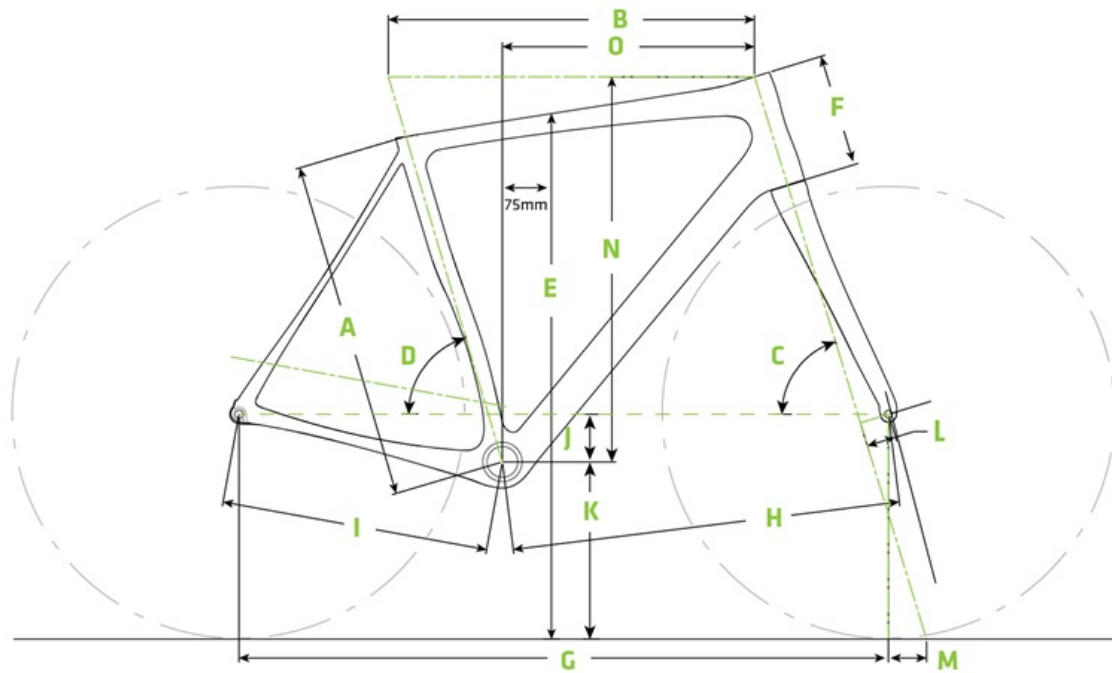

Synapse Carbon

	44	48	51	54	56	58	61
A SEAT TUBE LENGTH (CM)	37.0	40.7	44.3	48.0	52.0	55.0	59.0
B TOP TUBE HORIZONTAL (CM)	50.5	51.7	53.1	54.7	56.1	57.9	60.4
C HEAD TUBE ANGLE	70.2°	70.8°	71.7°	*	73.0°	73.0°	73.0°
D SEAT TUBE ANGLE	74.7°	74.6°	74.3°	73.9°	73.5°	73.0°	72.5°
E STANDOVER (CM)	68	71.2	74.2	77.3	80.4	83.3	86.8
F HEAD TUBE LENGTH (CM)	10.3	12.2	13.7	16.1	17.3	19.7	22.9
G WHEELBASE (CM)	98.9	99.6	99.4	100.8	99.5	100.9	102.8
H FRONT CENTER (CM)	59.1	59.8	59.6	60.9	59.6	60.9	62.7
I CHAIN STAY LENGTH (CM)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
J BOTTOM BRACKET DROP (CM)	7.5	7.5	7.5	7.3	7.3	7.0	7.0
K BOTTOM BRACKET HEIGHT (CM)	27.0	27.0	27.0	27.2	27.2	27.5	27.5
L FORK RAKE (CM)	6.0	6.0	5.5	5.5	4.5	4.5	4.5
M TRAIL (CM)	6	5.6	5.6	5.6	5.8	5.8	5.8
N STACK (CM)	51	53	55	57	59	61	64
O REACH (CM)	36.5	37.1	37.7	38.2	38.6	39.3	40.2