


2020 Synapse Hi-MOD Disc Ultegra Di2



A road bike that's light, stiff, fast and surprisingly comfortable. Your rides will go longer. You'll barely notice.

Produktspezifikation

| | |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rahmen | BallisTec Hi-MOD Carbon, Di2 ready, SAVE, BB30a, flat mount, 12mm thru axle, internal cable routing, removable fender bridge |
| Gabel | BallisTec Hi-MOD Carbon, SAVE, integrated crown race, 12x100mm thru-axle, internal routing, size-specific design - 44-48: 1 1/8" steerer, 60mm rake 51-54: 1-1/8" - 1-1/4" tapered steerer, 55mm rake 56-61: 1-1/8" - 1-3/8" tapered steerer, 45mm rake |
| Felgen | HollowGram 45 SL KNØT, Carbon, 20h front, 24h rear, 45mm deep, 21mm ID, tubeless ready |
| Naben | (F) HollowGram KNØT, sealed bearing 12x100 centerlock / (R) HollowGram KNØT, 12x142 centerlock w/ DT Swiss internals |
| Speichen | DT Swiss Aerolite |
| Reifen | Vittoria Corsa, 700 x 28c |
| Pedale | Not Included |
| Kurbel | HollowGram, BB30a w/ OPI SpideRing, 50/34 |
| Tretlager | Cannondale BB30 |
| Kette | Shimano HG701, 11-speed |
| Zahnkränze | Shimano Ultegra, 11-34, 11-speed |
| Umwerfer | Shimano Ultegra Di2, braze-on |
| Schaltwerk | Shimano Ultegra Di2 RX |
| Schalthebel | Shimano Ultegra Di2 hydro disc, 2x11 |
| Lenker | HollowGram SystemBar SAVE, Carbon, 8 deg. pitch adjust |
| Griffe | Cannondale Grip Bar Tape w/Gel, 3.5mm |
| Vorbau | All-New HollowGram SAVE, alloy, -6° |
| Steuersätze | Synapse Si, 25mm Carbon top cap |
| Bremsen | Shimano Ultegra Di2 hydro disc, 160/140mm RT800 rotors |
| Sattel | Fabric Scoop Shallow Race, titanium rails |
| Sattelstütze | Cannondale 2, UD Carbon, 25.4 x 350mm |
| Größen | 48, 51, 54, 56, 58, 61 |
| Extra(s) | Cannondale Wheel Sensor |

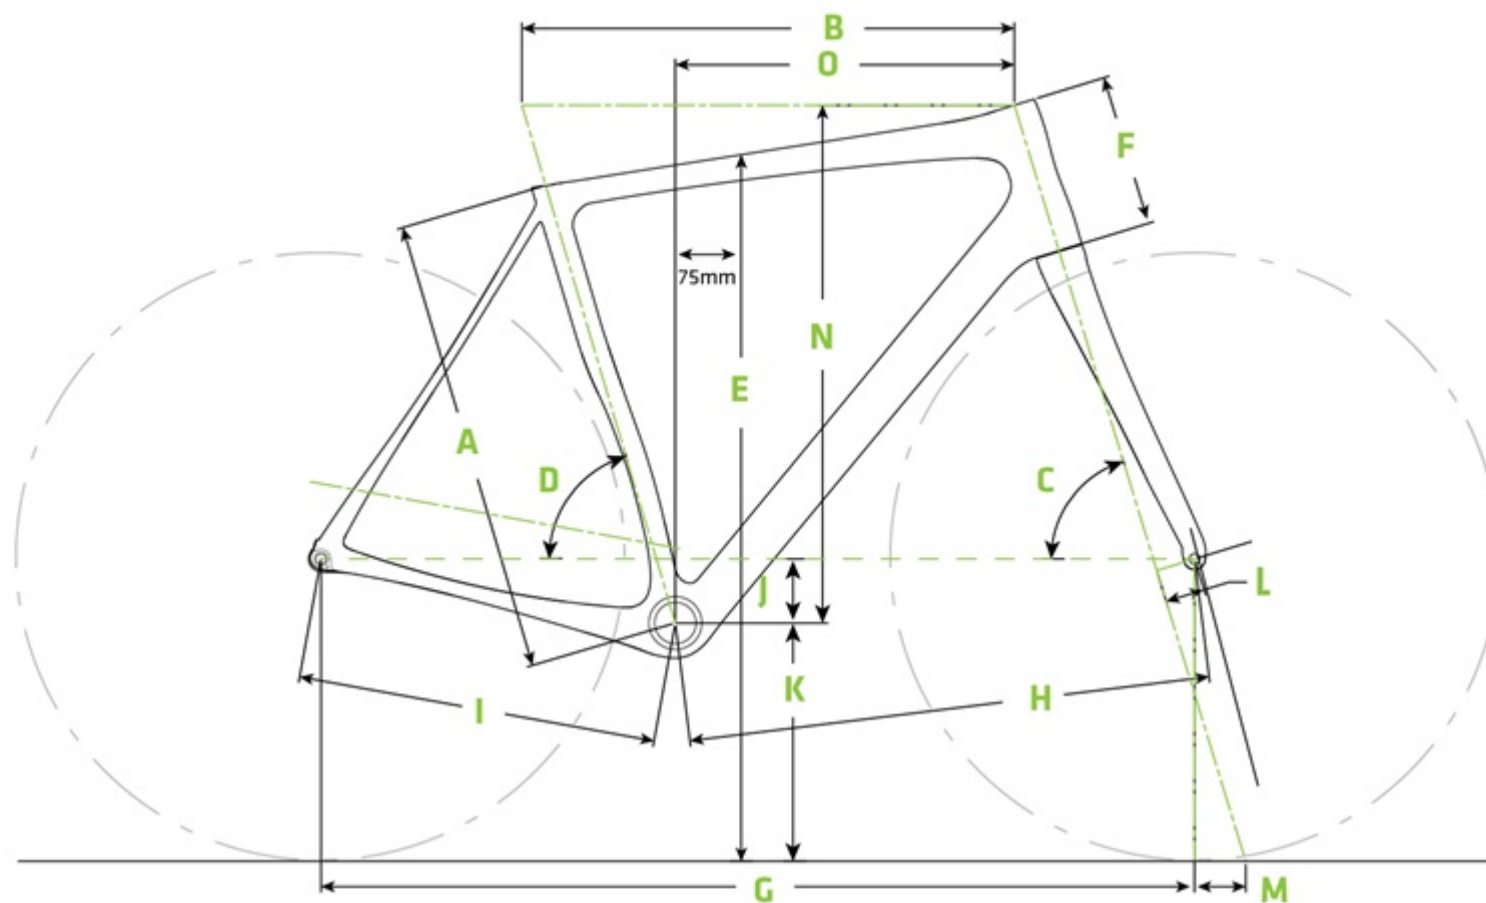

Synapse Carbon

| | 44 | 48 | 51 | 54 | 56 | 58 | 61 |
|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|
| A SEAT TUBE LENGTH (CM) | 37.0 | 40.7 | 44.3 | 48.0 | 52.0 | 55.0 | 59.0 |
| B TOP TUBE HORIZONTAL (CM) | 50.5 | 51.7 | 53.1 | 54.7 | 56.1 | 57.9 | 60.4 |
| C HEAD TUBE ANGLE | 70.2° | 70.8° | 71.7° | * | 73.0° | 73.0° | 73.0° |
| D SEAT TUBE ANGLE | 74.7° | 74.6° | 74.3° | 73.0° | 73.6° | 73.0° | 73.6° |

| | | | | | | | |
|-------------------------------------|------|------|------|-------|------|-------|-------|
| U SEAT TUBE ANGLE | 14.1 | 14.0 | 14.5 | 15.5 | 15.5 | 15.0 | 12.5 |
| E STANDOVER (CM) | 68 | 71.2 | 74.2 | 77.3 | 80.4 | 83.3 | 86.8 |
| F HEAD TUBE LENGTH (CM) | 10.3 | 12.2 | 13.7 | 16.1 | 17.3 | 19.7 | 22.9 |
| G WHEELBASE (CM) | 98.9 | 99.6 | 99.4 | 100.8 | 99.5 | 100.9 | 102.8 |
| H FRONT CENTER (CM) | 59.1 | 59.8 | 59.6 | 60.9 | 59.6 | 60.9 | 62.7 |
| I CHAIN STAY LENGTH (CM) | 41.0 | 41.0 | 41.0 | 41.0 | 41.0 | 41.0 | 41.0 |
| J BOTTOM BRACKET DROP (CM) | 7.5 | 7.5 | 7.5 | 7.3 | 7.3 | 7.0 | 7.0 |
| K BOTTOM BRACKET HEIGHT (CM) | 27.0 | 27.0 | 27.0 | 27.2 | 27.2 | 27.5 | 27.5 |
| L FORK RAKE (CM) | 6.0 | 6.0 | 5.5 | 5.5 | 4.5 | 4.5 | 4.5 |
| M TRAIL (CM) | 6 | 5.6 | 5.6 | 5.6 | 5.8 | 5.8 | 5.8 |
| N STACK (CM) | 51 | 53 | 55 | 57 | 59 | 61 | 64 |
| O REACH (CM) | 36.5 | 37.1 | 37.7 | 38.2 | 38.6 | 39.3 | 40.2 |