

## 2020 Synapse Carbon Disc Ultegra

---




A road bike that's light, stiff, fast and surprisingly comfortable. Your rides will go longer. You'll barely notice.

### Produktspezifikation

---

<b>Rahmen</b>	BallisTec Carbon, Di2 ready, SAVE, BB30a, flat mount, 12mm thru axle, internal cable routing, removable fender bridge
<b>Gabel</b>	BallisTec Carbon, SAVE, integrated crown race, 12x100mm thru-axle, internal routing, size-specific design - 44-48: 1 1/8" steerer, 60mm rake 51-54: 1-1/8" - 1-1/4" tapered steerer, 55mm rake 56-61: 1-1/8" - 1-3/8" tapered steerer, 45mm rake
<b>Felgen</b>	Fulcrum Racing 600 DB, Alloy clincher, 26mm deep
<b>Naben</b>	(F) Fulcrum Racing 600 DB, 12x100 / (R) Fulcrum Racing 600 DB, 12x142
<b>Speichen</b>	Fulcrum, Stainless steel
<b>Reifen</b>	Vittoria Rubino Pro Bright Black, 700x30c
<b>Pedale</b>	Not Included
<b>Kurbel</b>	Cannondale 1, BB30a, FSA rings, 50/34
<b>Tretlager</b>	Cannondale Alloy PressFit30
<b>Kette</b>	Shimano HG601, 11-speed
<b>Zahnkränze</b>	Shimano 105, 11-34, 11-speed
<b>Umwerfer</b>	Shimano Ultegra, braze-on
<b>Schaltwerk</b>	Shimano Ultegra GS
<b>Schalthebel</b>	Shimano Ultegra hydro disc, 2x11
<b>Lenker</b>	Cannondale 3, 6061 alloy, Compact
<b>Griffe</b>	Cannondale Grip Bar Tape w/Gel, 3.5mm
<b>Vorbau</b>	Cannondale 3, 6061 alloy, 7-degree
<b>Steuersätze</b>	Synapse, 1-1/4" lower bearing, 25mm top cap
<b>Bremsen</b>	Shimano Ultegra hydro disc, 160/160mm RT30 rotors
<b>Sattel</b>	Fabric Scoop Shallow Sport, steel rails
<b>Sattelstütze</b>	Cannondale 3, 6061 Alloy, 25.4 x 350mm (46-56), 400mm (58-61)
<b>Größen</b>	48, 51, 54, 56, 58, 61

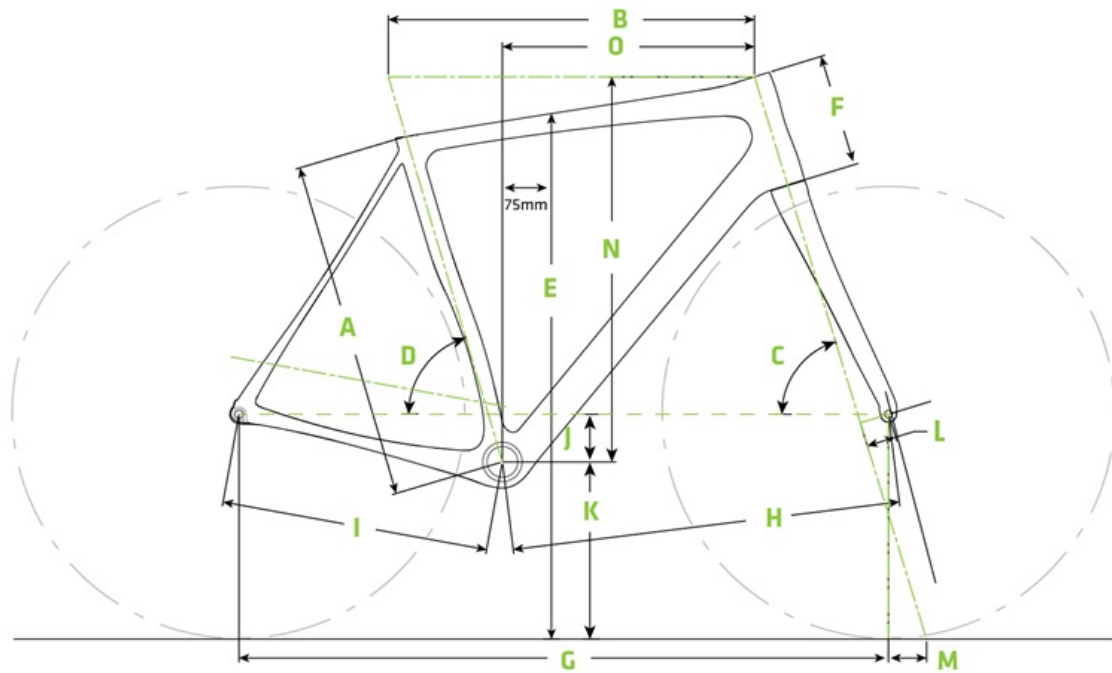

## Synapse Carbon

	44	48	51	54	56	58	61
<b>A SEAT TUBE LENGTH (CM)</b>	37.0	40.7	44.3	48.0	52.0	55.0	59.0
<b>B TOP TUBE HORIZONTAL (CM)</b>	50.5	51.7	53.1	54.7	56.1	57.9	60.4
<b>C HEAD TUBE ANGLE</b>	70.2°	70.8°	71.7°	*	73.0°	73.0°	73.0°
<b>D SEAT TUBE ANGLE</b>	74.7°	74.6°	74.3°	73.9°	73.5°	73.0°	72.5°
<b>E STANDOVER (CM)</b>	68	71.2	74.2	77.3	80.4	83.3	86.8
<b>F HEAD TUBE LENGTH (CM)</b>	10.3	12.2	13.7	16.1	17.3	19.7	22.9
<b>G WHEELBASE (CM)</b>	98.9	99.6	99.4	100.8	99.5	100.9	102.8
<b>H FRONT CENTER (CM)</b>	59.1	59.8	59.6	60.9	59.6	60.9	62.7
<b>I CHAIN STAY LENGTH (CM)</b>	41.0	41.0	41.0	41.0	41.0	41.0	41.0
<b>J BOTTOM BRACKET DROP (CM)</b>	7.5	7.5	7.5	7.3	7.3	7.0	7.0
<b>K BOTTOM BRACKET HEIGHT (CM)</b>	27.0	27.0	27.0	27.2	27.2	27.5	27.5
<b>L FORK RAKE (CM)</b>	6.0	6.0	5.5	5.5	4.5	4.5	4.5
<b>M TRAIL (CM)</b>	6	5.6	5.6	5.6	5.8	5.8	5.8
<b>N STACK (CM)</b>	51	53	55	57	59	61	64
<b>O REACH (CM)</b>	36.5	37.1	37.7	38.2	38.6	39.3	40.2